

KryTech 583

DESCRIPTION AND GENERAL PROPERTIES

- **Material** Nitrile sandy
- **Length (cm)** 24 to 30
- **Thickness (mm)**
- **Wrist** Knitted wrist
- **Colour/Color** Black / Grey
- **Interior finish** Seamless textile support from HDPE fibres
- **Exterior finish** Ventilated back
- **Size / EAN** 7 8 9 10 11
- **Packaging** 1 pair/bag - 12 pairs/bag - 48 pairs/carton
- **Complementary information** Guaranteed without silicone



PERFORMANCE RESULTS

Certification category 2



Dexterity EN 420 : 5/5


4X42C

Legends

EN 388 MECHANICAL HAZARDS




PERFORMANCE LEVELS

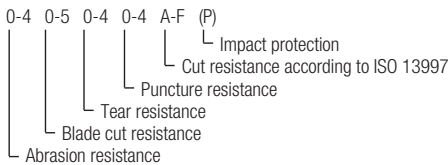

EN 407 THERMAL RISKS heat and fire



PERFORMANCE LEVELS

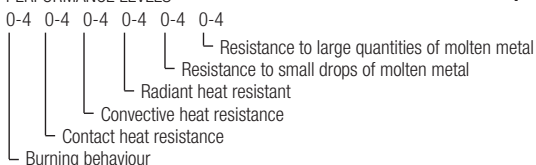

CHEMICAL RISKS

EN ISO 374-1



Type A
U V W X Y Z

- A Methanol
- B Acetone
- C Acetonitrile
- D Dichloromethane
- E Carbon Disulfide
- F Toluene
- G Diethylamine
- H Tetrahydrofuran
- I Ethyl acetate

EN ISO 374-1



Type B
X Y Z

- J n-Heptane
- K Sodium hydroxide 40%
- L Sulphuric acid 96%
- M Nitric acid 65%
- N Acetic acid 99%
- O Ammonia 25%
- P Hydrogen peroxide 30%
- S Hydrofluoric acid 40%
- T Formaldehyde 37%

EN ISO 374-1



Type C

MICRO-ORGANISMS

EN ISO 374-5



Protection against bacteria, fungi

EN ISO 374-5




Protection against bacteria, fungi, virus

VIRUS



COLD HAZARDS

PERFORMANCE LEVELS



RADIOACTIVE CONTAMINATION



CUT RESISTANCE

A1 ≥ 200 G	A4 ≥ 1500 G	A7 ≥ 4000 G
A2 ≥ 500 G	A5 ≥ 2200 G	A8 ≥ 5000 G
A3 ≥ 1000 G	A6 ≥ 3000 G	A9 ≥ 6000 G

For more details: www.mapa-pro.com

MAPA
PROFESSIONAL

www.mapa-pro.com

SPECIFIC ADVANTAGES

- A seamless plaited glove for a maximum comfort on skin, dexterity and flexibility.
- Optimal cut resistance
- Exclusive coating process for an optimal durability that offers a better productivity and optimizes your costs
- Limited perspiration thanks to a high breathability of the coating
- STANDARD 100 by OEKO-TEX® / Silicone Free / DMF free

MAIN FIELDS OF USE

Automotive/mechanical industry

- Assembly of small parts
- Assembly of thin metal sheets
- Automotive assembly
- Handling and sorting small, sharp parts
- Bodywork assembly
- Finishing sharp parts

Glass industry

- Handling glass sheets

Industrial equipment / Metal transformation

- Maintenance with cut risk
- Metal working

Mechanical industry

- Assembly of small, oil and grease free parts

INSTRUCTIONS FOR USE

Instructions for use

- It is recommended to check that the gloves are suitable for the intended use, because the conditions of use in the workplace may differ from the tests performed in the laboratory.
- It is recommended to not use them next to moving machinery
- It is not recommended for persons sensitised to natural latex(wrist with elastic natural rubber).
- Put the gloves on dry, clean hands.
- Ensure the inside of the gloves is dry before putting them on again.

Storage conditions

- Store the gloves in their original packaging protected from heat, light and humidity.

LEGISLATION

This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council. This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).

- **UE type certificate or CE type examination certificate** : 0075/014/162/03/19/0998
- **Issued by the notified body nr** : CTC - 4 rue Hermann Frenkel- 69367 Lyon cedex 07 - France - 0075