# KryTech 601

# **DESCRIPTION AND GENERAL PROPERTIES**

- Length (cm) 23 to 28
- Thickness (mm)
- · Wrist Knitted wrist
- Colour/Color Grey
- Interior finish Seamless textile support from HDPE fibres
- Size / EAN 7 8 9 10 11
- Packaging 12 pairs/bag 48 pairs/carton
- Complementary information Guaranteed without silicone



## PERFORMANCE RESULTS

# Certification category 2






ISO 13997 :

ISO 13997 defines the weight on the blade required to cut in a single movement.

Data was obtained according to ISO 13997, from the average of several measurements. As Individual specimens will obviously have greater or lesser cut resistance than the average, so this result can provide only a general indication of the cut resistance of any protective material.

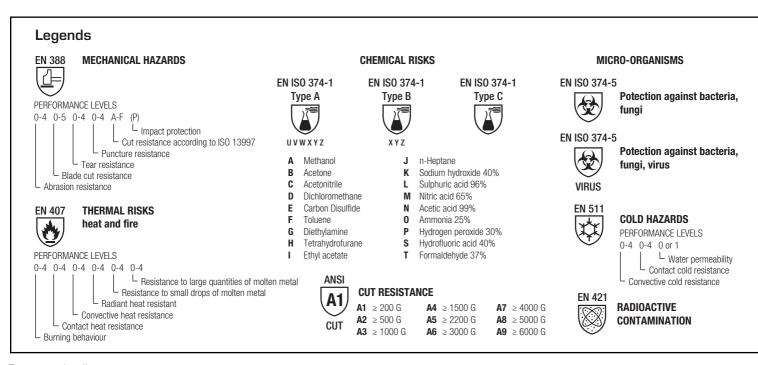

For more details: www.mapa-pro.com



# SPECIFIC ADVANTAGES

- A high dexterity coupled with a good cut performance
- Color adapted to dirty environements for a prolonged durability.
- Ambidextrous
- All performances are guaranteed after one washing cycle at 40°C
- OEKO-TEX® certified to guarantee the absolute protection of the health of the workers

### **MAIN FIELDS OF USE**

#### Automotive/mechanical industry

#### Finishing work

#### Plastics industry

· Post-injection material removal

# **INSTRUCTIONS FOR USE**

#### Instructions for use

- It is recommended to check that the gloves are suitable for the intended use, because the conditions of use in the workplace may differ from the tests performed in the laboratory.
- It is not recommended for persons sensitised to natural latex( wrist with elastic natural rubber)
- It is not recommended to use this glove next to moving machinery.
- Put the gloves on dry, clean hands.
- Ensure the insides of the gloves are dry before putting them on again.

#### Storage conditions

- Store the gloves in their original packaging protected from heat, light and
- humidity

#### Laundering conditions

- Performances of the gloves are guaranteed after 1 cleaning cycle under the conditions described above:
- Washing condition as per standard ISO6330-2012 : conditions 4M as per appendix [typeA].
- Improper use of the gloves or submitting them to a cleaning or laundering process that is not specifically recommended can alter their
- performance levels.

#### **Drying conditions**

- Drying at ambient air according standard ISO6330-2012 (procedure C)
- Put the gloves on dry, clean hands. Ensure the inside of the gloves is dry before putting them on again.

# **LEGISLATION**

This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council. This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).

- UE type certificate or CE type examination certificate: 0075/014/162/03/18/0524
- $\bullet$  Issued by the notified body nr : 0075 CTC , rue Hermann Frenkel 69667 Lyon cedex 07-France

