

# TempDex 710

## DESCRIPTION AND GENERAL PROPERTIES

- **Material** Nitrile sandy
- **Length (cm)** 24-28
- **Thickness (mm)**
- **Wrist** Knitted wrist
- **Colour/Color** Yellow
- **Interior finish** Seamless textile support
- **Exterior finish** Dots
- **Size / EAN** 7 9 11
- **Packaging** 1 pair/bag - 10 pairs/bag - 50 pairs/carton
- **Complementary information** Guaranteed without silicone



## PERFORMANCE RESULTS

Certification category 2



Dexterity EN 420 : 5/5



X1XXXX


4111X

### Legends

#### EN 388 MECHANICAL HAZARDS




##### PERFORMANCE LEVELS

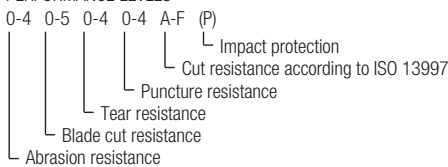

#### EN 407 THERMAL RISKS heat and fire



##### PERFORMANCE LEVELS

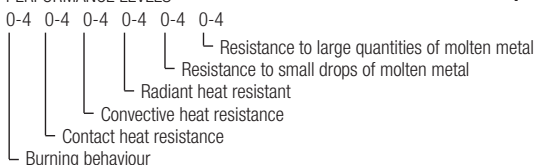

#### CHEMICAL RISKS

##### EN ISO 374-1



Type A

U V W X Y Z

- A Methanol
- B Acetone
- C Acetonitrile
- D Dichloromethane
- E Carbon Disulfide
- F Toluene
- G Diethylamine
- H Tetrahydrofuran
- I Ethyl acetate

##### EN ISO 374-1



Type B

X Y Z

- J n-Heptane
- K Sodium hydroxide 40%
- L Sulphuric acid 96%
- M Nitric acid 65%
- N Acetic acid 99%
- O Ammonia 25%
- P Hydrogen peroxide 30%
- S Hydrofluoric acid 40%
- T Formaldehyde 37%

##### EN ISO 374-1



Type C

#### MICRO-ORGANISMS

##### EN ISO 374-5



Protection against bacteria, fungi

##### EN ISO 374-5




Protection against bacteria, fungi, virus

##### VIRUS



#### COLD HAZARDS

##### PERFORMANCE LEVELS



RADIOACTIVE CONTAMINATION



CUT

#### CUT RESISTANCE

A1 ≥ 200 G	A4 ≥ 1500 G	A7 ≥ 4000 G
A2 ≥ 500 G	A5 ≥ 2200 G	A8 ≥ 5000 G
A3 ≥ 1000 G	A6 ≥ 3000 G	A9 ≥ 6000 G

For more details: [www.mapa-pro.com](http://www.mapa-pro.com)

**MAPA**  
PROFESSIONAL

[www.mapa-pro.com](http://www.mapa-pro.com)

## SPECIFIC ADVANTAGES

- Thin, anatomically-shaped glove ensures dexterity
- Excellent abrasion resistance: longer lasting
- Available in vending machine packaging

## MAIN FIELDS OF USE

### Ceramic and plastics industry

- Handling of composite materials after heat processing

### Other industries

- Handling of moulds in the ceramic industry
- Handling of hot steel after welding
- Handling of hot piping

### Construction Industry (Heating engineers/Plumbers)

- Maintaining pipes, heating equipment

## INSTRUCTIONS FOR USE

### Instructions for use

- It is recommended to check that the gloves are suitable for the intended use, because the conditions of use at workplace may differ from the "CE"-type tests.
- It is not recommended for persons sensitized to dithiocarbamates and to natural latex (wrist with elastic natural rubber )
- Do not use in direct contact with a flame
- Put the gloves on dry, clean hands.
- Ensure the inside of the gloves is dry before putting them on again.
- Inspect the gloves for cracks or snags before reusing them.

### Storage conditions

- Store the glove in their original packaging protected from heat, light and humidity.

### Laundering conditions

- Caution: improper use of the gloves or submitting them to a cleaning or laundering process that is not specifically recommended can alter their performance levels.

### Food contact US

- FDA 21CFR 177.2600

## LEGISLATION

This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council. This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).

- **UE type certificate or CE type examination certificate** : 0075/014/162/12/18/3062
- **Issued by the notified body nr** : 0075 - C.T.C. – 4 rue Hermann Frenkel - F-69367 LYON CEDEX 07 FRANCE